YORK®

File in SJ4 Manual(s).

SERVICE BULLETIN

Supersedes: None | 294 | Form 160.46-CM3.1 (884)

File with Form: 160.46-CM3.1

94-8

SUBJECT: LIQUID COOLED STARTER - COOLANT LEAKING FROM BRICKS

Each SCR brick includes a heat exchanger plate which utilizes three pipe plugs. If you discover coolant leaking from the pipe plugs on any liquid-cooled solid state starter brick, we would like you to replace the complete brick assembly, and return the leaky one to the factory for evaluation. We ask that you DO NOT attempt to repair the leaky pipe plug with teflon tape or other sealant. We would like to receive the faulty brick in it's original condition as built at our factory.

To date no leaky bricks have been seen in the field. There have been a few instances which were discovered during assembly in our shop.

Send any defective brick to:

YORK INTERNATIONAL CORPORATION
attn: D. Saylor - Door 100
631 S. Richland Ave.
York, PA. 17403

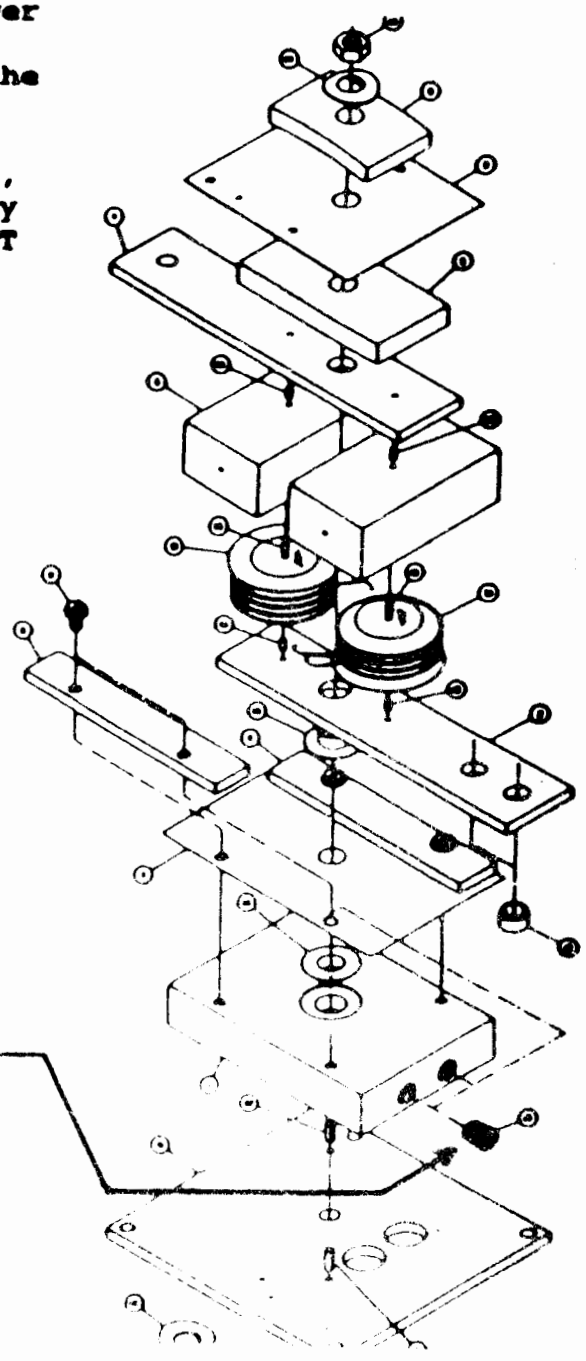

SSP SM 294 .05
CODE SJ4A