



# SERVICE BULLETIN

**SERVICE BULLETIN**

Supersedes: Nothing


Form 160.48-M2 (SB10)(698)

File With 160.48-M2

SUBJ.: KEY PAD CHECK OUT

PRODUCTS: YT, YK, YS, YG, YB,  
PARAFLOW, ISO FLOW

YOU WILL FIND BELOW A LAYOUT OF THE YORK KEYPAD. I NUMBERED EACH KEY TO HELP YOU LOCATE THE KEY THAT COROSPONDS TO THE PIN LAYOUT SHOWN BELOW. SIMPLY FILL IN THE BLANKS BELOW WHEN TROUBLESHOOTING THE KEYPAD:

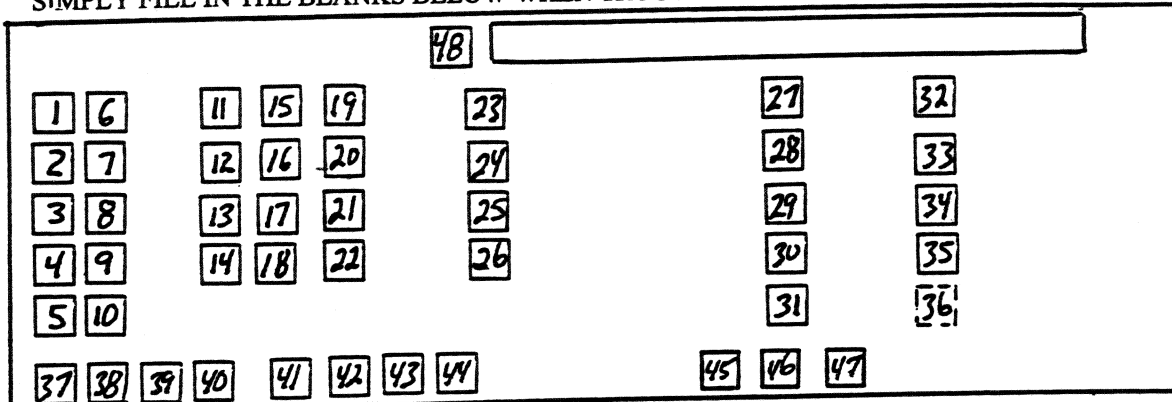

KEY	PIN	PIN	Depressed / not depressed	KEY	PIN	PIN	Depressed / not depressed
1	2	14	_____	25	4	9	_____
2	3	14	_____	26	5	9	_____
3	4	14	_____	27	2	8	_____
4	5	14	_____	28	3	8	_____
5	6	14	_____	29	4	8	_____
6	2	13	_____	30	5	8	_____
7	3	13	_____	31	6	8	_____
8	4	13	_____	32	2	7	_____
9	6	13	_____	33	3	7	_____
10	6	12	_____	34	4	7	_____
11	2	12	_____	35	5	7	_____
12	3	12	_____	36	6	7	_____
13	4	12	_____	37	15	14	_____
14	6	12	_____	38	15	13	_____
15	2	11	_____	39	15	12	_____
16	3	11	_____	40	15	11	_____
17	4	11	_____	41	15	10	_____
18	5	11	_____	42	15	9	_____
19	2	10	_____	43	15	8	_____
20	3	10	_____	44	15	7	_____
21	4	10	_____	45	6	9	_____
22	5	10	_____	46	6	10	_____
23	2	9	_____	47	6	11	_____
24	3	9	_____	48	13	5	_____

- ① STATIC SHIELD
- ② ROW88
- ③ ROW8
- ④ ROW28
- ⑤ ROW48
- ⑥ ROW84
- ⑦ COLUMN81
- ⑧ COLUMN82
- ⑨ COLUMN84
- ⑩ COLUMN88
- ⑪ COLUMN8
- ⑫ COLUMN28
- ⑬ COLUMN48
- ⑭ COLUMN88
- ⑮ ROW88

Key *not depressed* must read greater than 1MEG ohm (note: this reading used to be 10,000 ohms)  
Key *depressed* must read less than 100 ohms

**MAKE EXTRA COPIES OF THIS SHEET FOR FUTURE JOBS**