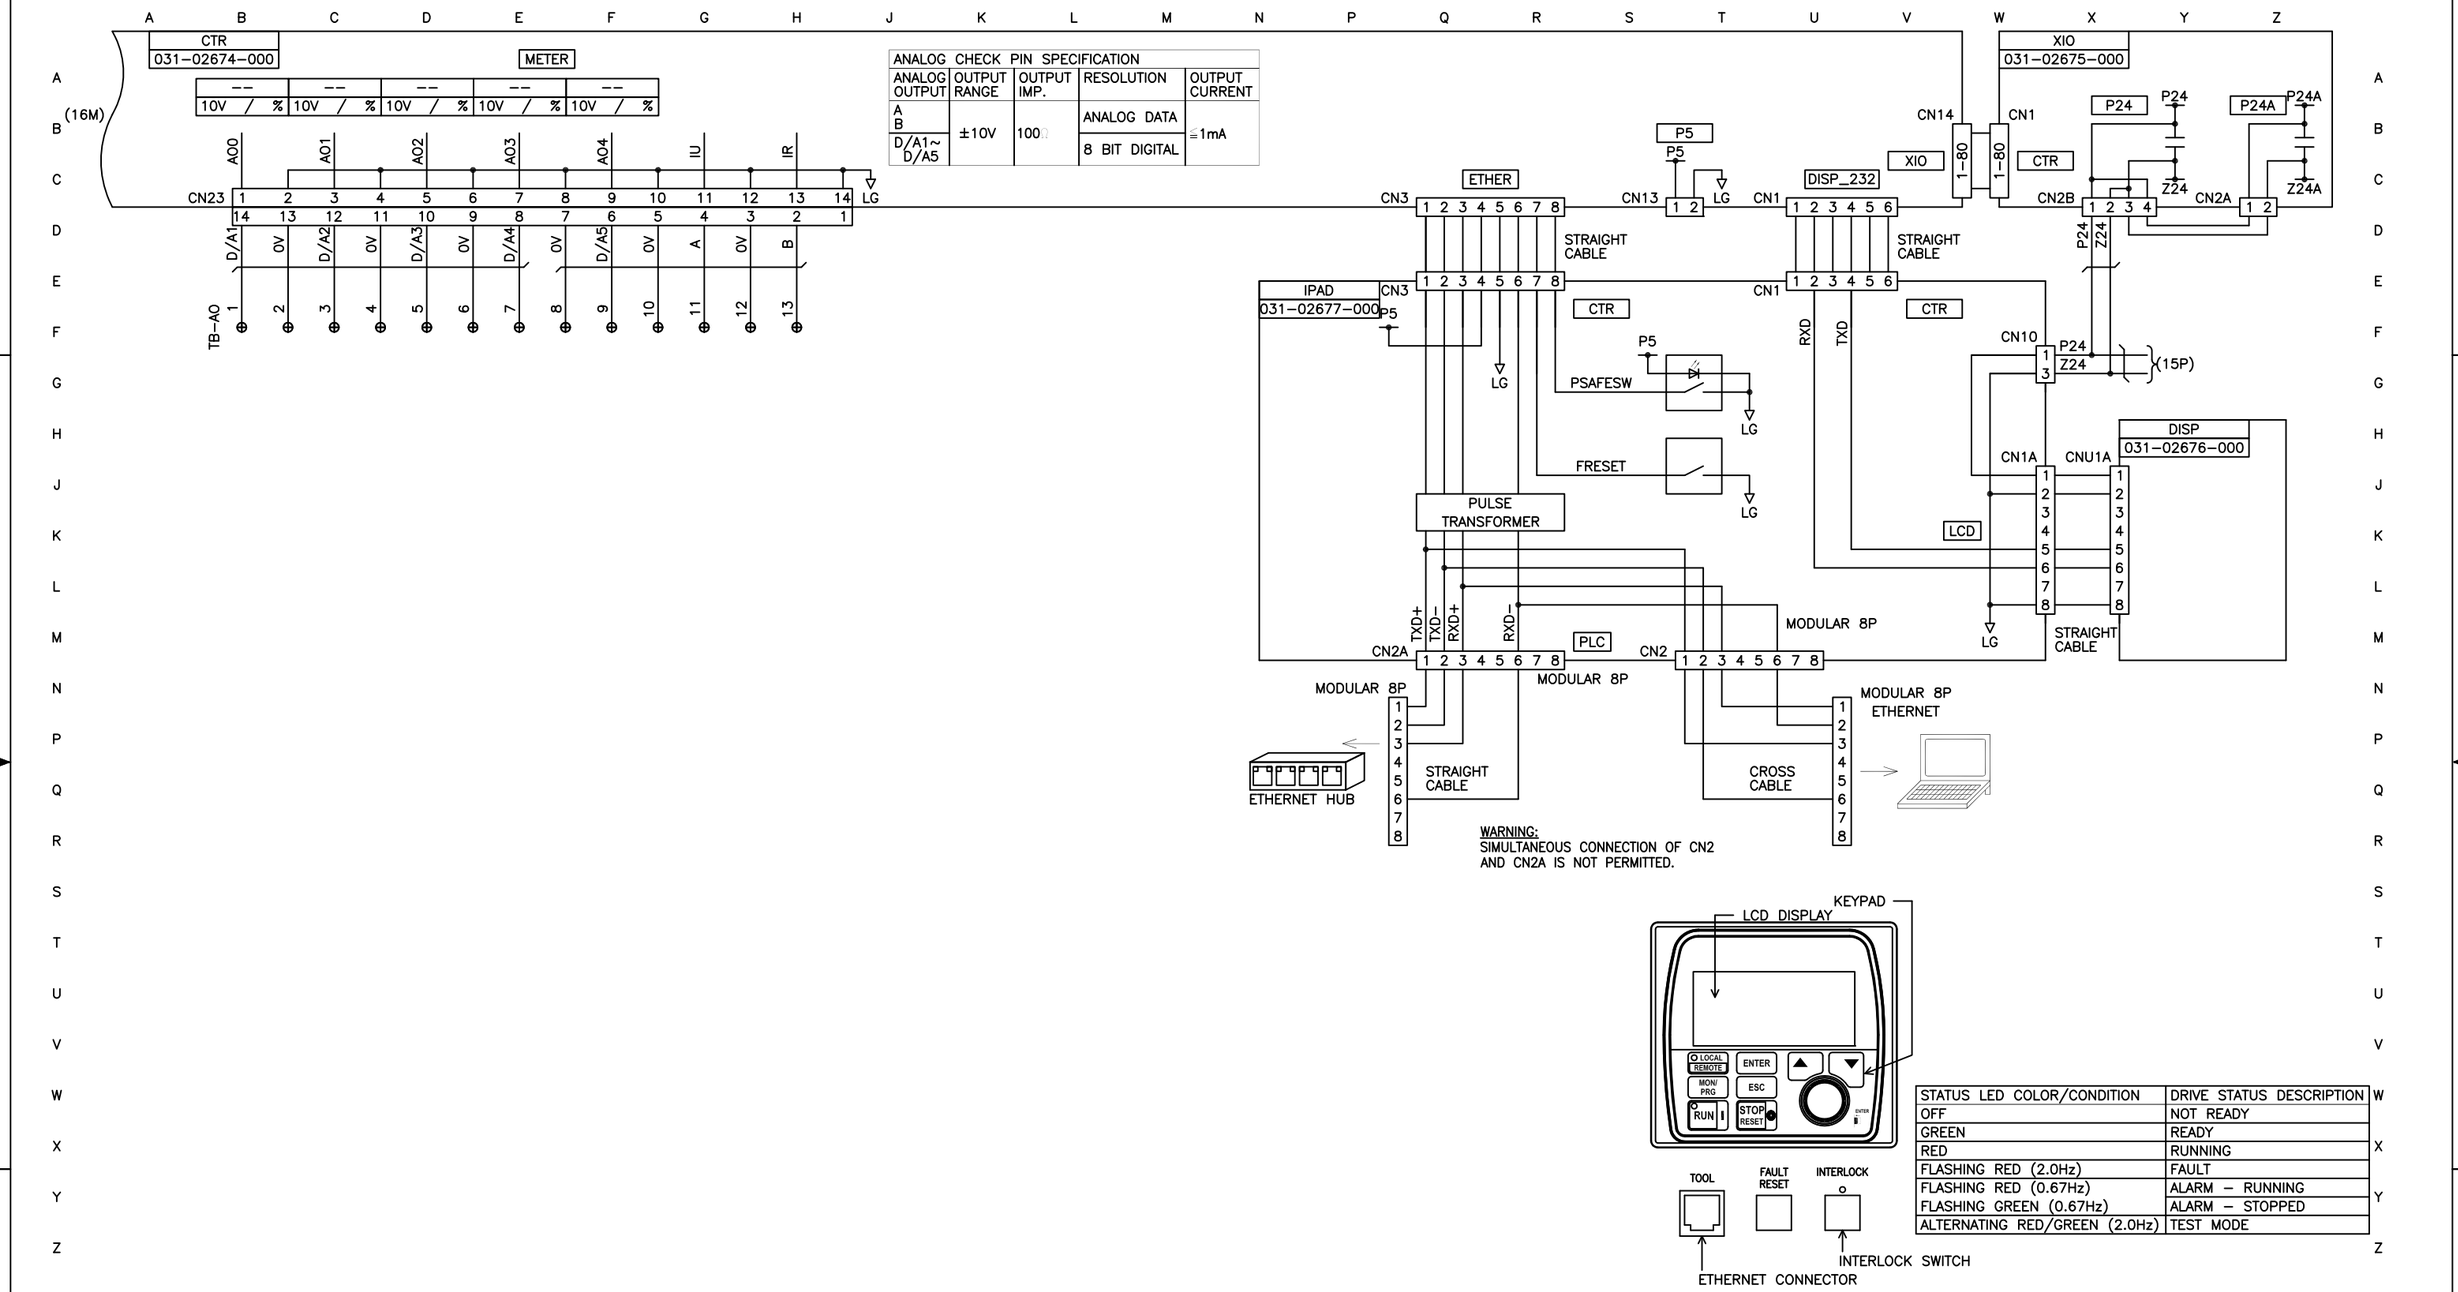


| ANALOG OUTPUT | OUTPUT RANGE | OUTPUT IMP. | RESOLUTION | OUTPUT CURRENT |
|---|---|---|---|---|
| A<br>B | ±10V | 100Ω | ANALOG DATA | ≅1mA |
| D/A1~<br>D/A5 | | | 8 BIT DIGITAL | |

ANALOG CHECK PIN SPECIFICATION

| STATUS LED COLOR/CONDITION | DRIVE STATUS DESCRIPTION |
|---|---|
| OFF | NOT READY |
| GREEN | READY |
| RED | RUNNING |
| FLASHING RED (2.0Hz) | FAULT |
| FLASHING RED (0.67Hz) | ALARM – RUNNING |
| FLASHING GREEN (0.67Hz) | ALARM – STOPPED |
| ALTERNATING RED/GREEN (2.0Hz) | TEST MODE |

| REV. LEV. | DATE | REVISION RECORD | CHG. NO. | DR. | CK. |
|---|---|---|---|---|---|
| 6 | | | | | |
| 5 | | | | | |
| 4 | | | | | |
| 3 | | | | | |
| 2 | | | | | |
| 1 | | | | | |
| 0 | 06/22/09 | FIRST ISSUE | | XZ | AL |

| REV. LEV. | DATE | REVISION RECORD | CHG. NO. | DR. | CK. |
|---|---|---|---|---|---|
| 13 | | | | | |
| 12 | | | | | |
| 11 | | | | | |
| 10 | | | | | |
| 9 | | | | | |
| 8 | | | | | |
| 7 | | | | | |

| REV. LEV. | DATE | REVISION RECORD | CHG. NO. | DR. | CK. |
|---|---|---|---|---|---|
| 20 | | | | | |
| 19 | | | | | |
| 18 | | | | | |
| 17 | | | | | |
| 16 | | | | | |
| 15 | | | | | |
| 14 | | | | | |

"ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR IN PART, OR DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS WITHOUT WRITTEN RELEASE BY YORK INTERNATIONAL CORPORATION".

YORK INTERNATIONAL CORPORATION
YORK , PA . 17405

DIMENSIONS ARE IN INCHES
DO NOT SCALE
TOLERANCES PER ENG. STD. M-282
WELDING PER ENG. STD. M-30
REF. DWG.

PCB (2)
INTERCONNECTION

MATERIAL
TYPE _____ ENG. STD. _____
PART NO. _____
CUT SIZE _____

NAME DATE
DR.
APPR.
SCALE:

SIZE D
CAGE NO
DRAWING NUMBER I808N417
WT. = LBS.
ORIG. NO.
SHEET 10 of 15