

ANALOG CHECK PIN SPECIFICATION				
ANALOG OUTPUT	OUTPUT RANGE	OUTPUT IMP.	RESOLUTION	OUTPUT CURRENT
A	±10V	100Ω	ANALOG DATA	≅1mA
B			8 BIT DIGITAL	

STATUS LED COLOR/CONDITION	DRIVE STATUS DESCRIPTION
OFF	NOT READY
GREEN	READY
RED	RUNNING
FLASHING RED (2.0Hz)	FAULT
FLASHING RED (0.67Hz)	ALARM - RUNNING
FLASHING GREEN (0.67Hz)	ALARM - STOPPED
ALTERNATING RED/GREEN (2.0Hz)	TEST MODE

REV. LEV.	DATE	REVISION RECORD	CHG. NO.	DR.	CK.	REV. LEV.	DATE	REVISION RECORD	CHG. NO.	DR.	CK.	REV. LEV.	DATE	REVISION RECORD	CHG. NO.	DR.	CK.
6						13						20					
5						12						19					
4						11						18					
3						10						17					
2						9						16					
1						8						15					
0	05/19/00	FIRST ISSUE		XZ	AL	7						14					

**YORK INTERNATIONAL CORPORATION**  
YORK, PA . 17405



DIMENSIONS ARE IN INCHES  
DO NOT SCALE  
TOLERANCES PER ENG. STD. M-282  
WELDING PER ENG. STD. M-30  
REF. DWG.

**PCB (2)  
INTERCONNECTION**

MATERIAL  
TYPE \_\_\_\_\_ ENG. STD. \_\_\_\_\_  
PART NO. \_\_\_\_\_  
CUT SIZE \_\_\_\_\_

DR. _____	DATE _____	SIZE D	CAGE NO. _____	DRAWING NUMBER 1808MW17
APPR. _____				
SCALE: _____				

WT. = \_\_\_\_\_ LBS.    ORIG. NO. \_\_\_\_\_    SHEET 10 of 15

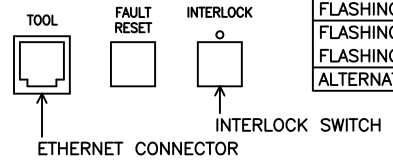

**WARNING:**  
SIMULTANEOUS CONNECTION OF CN2  
AND CN2A IS NOT PERMITTED.