


8 7 6 5 4 3 2 1

A B C D E F G H J K L M N P Q R S T U V W X Y Z

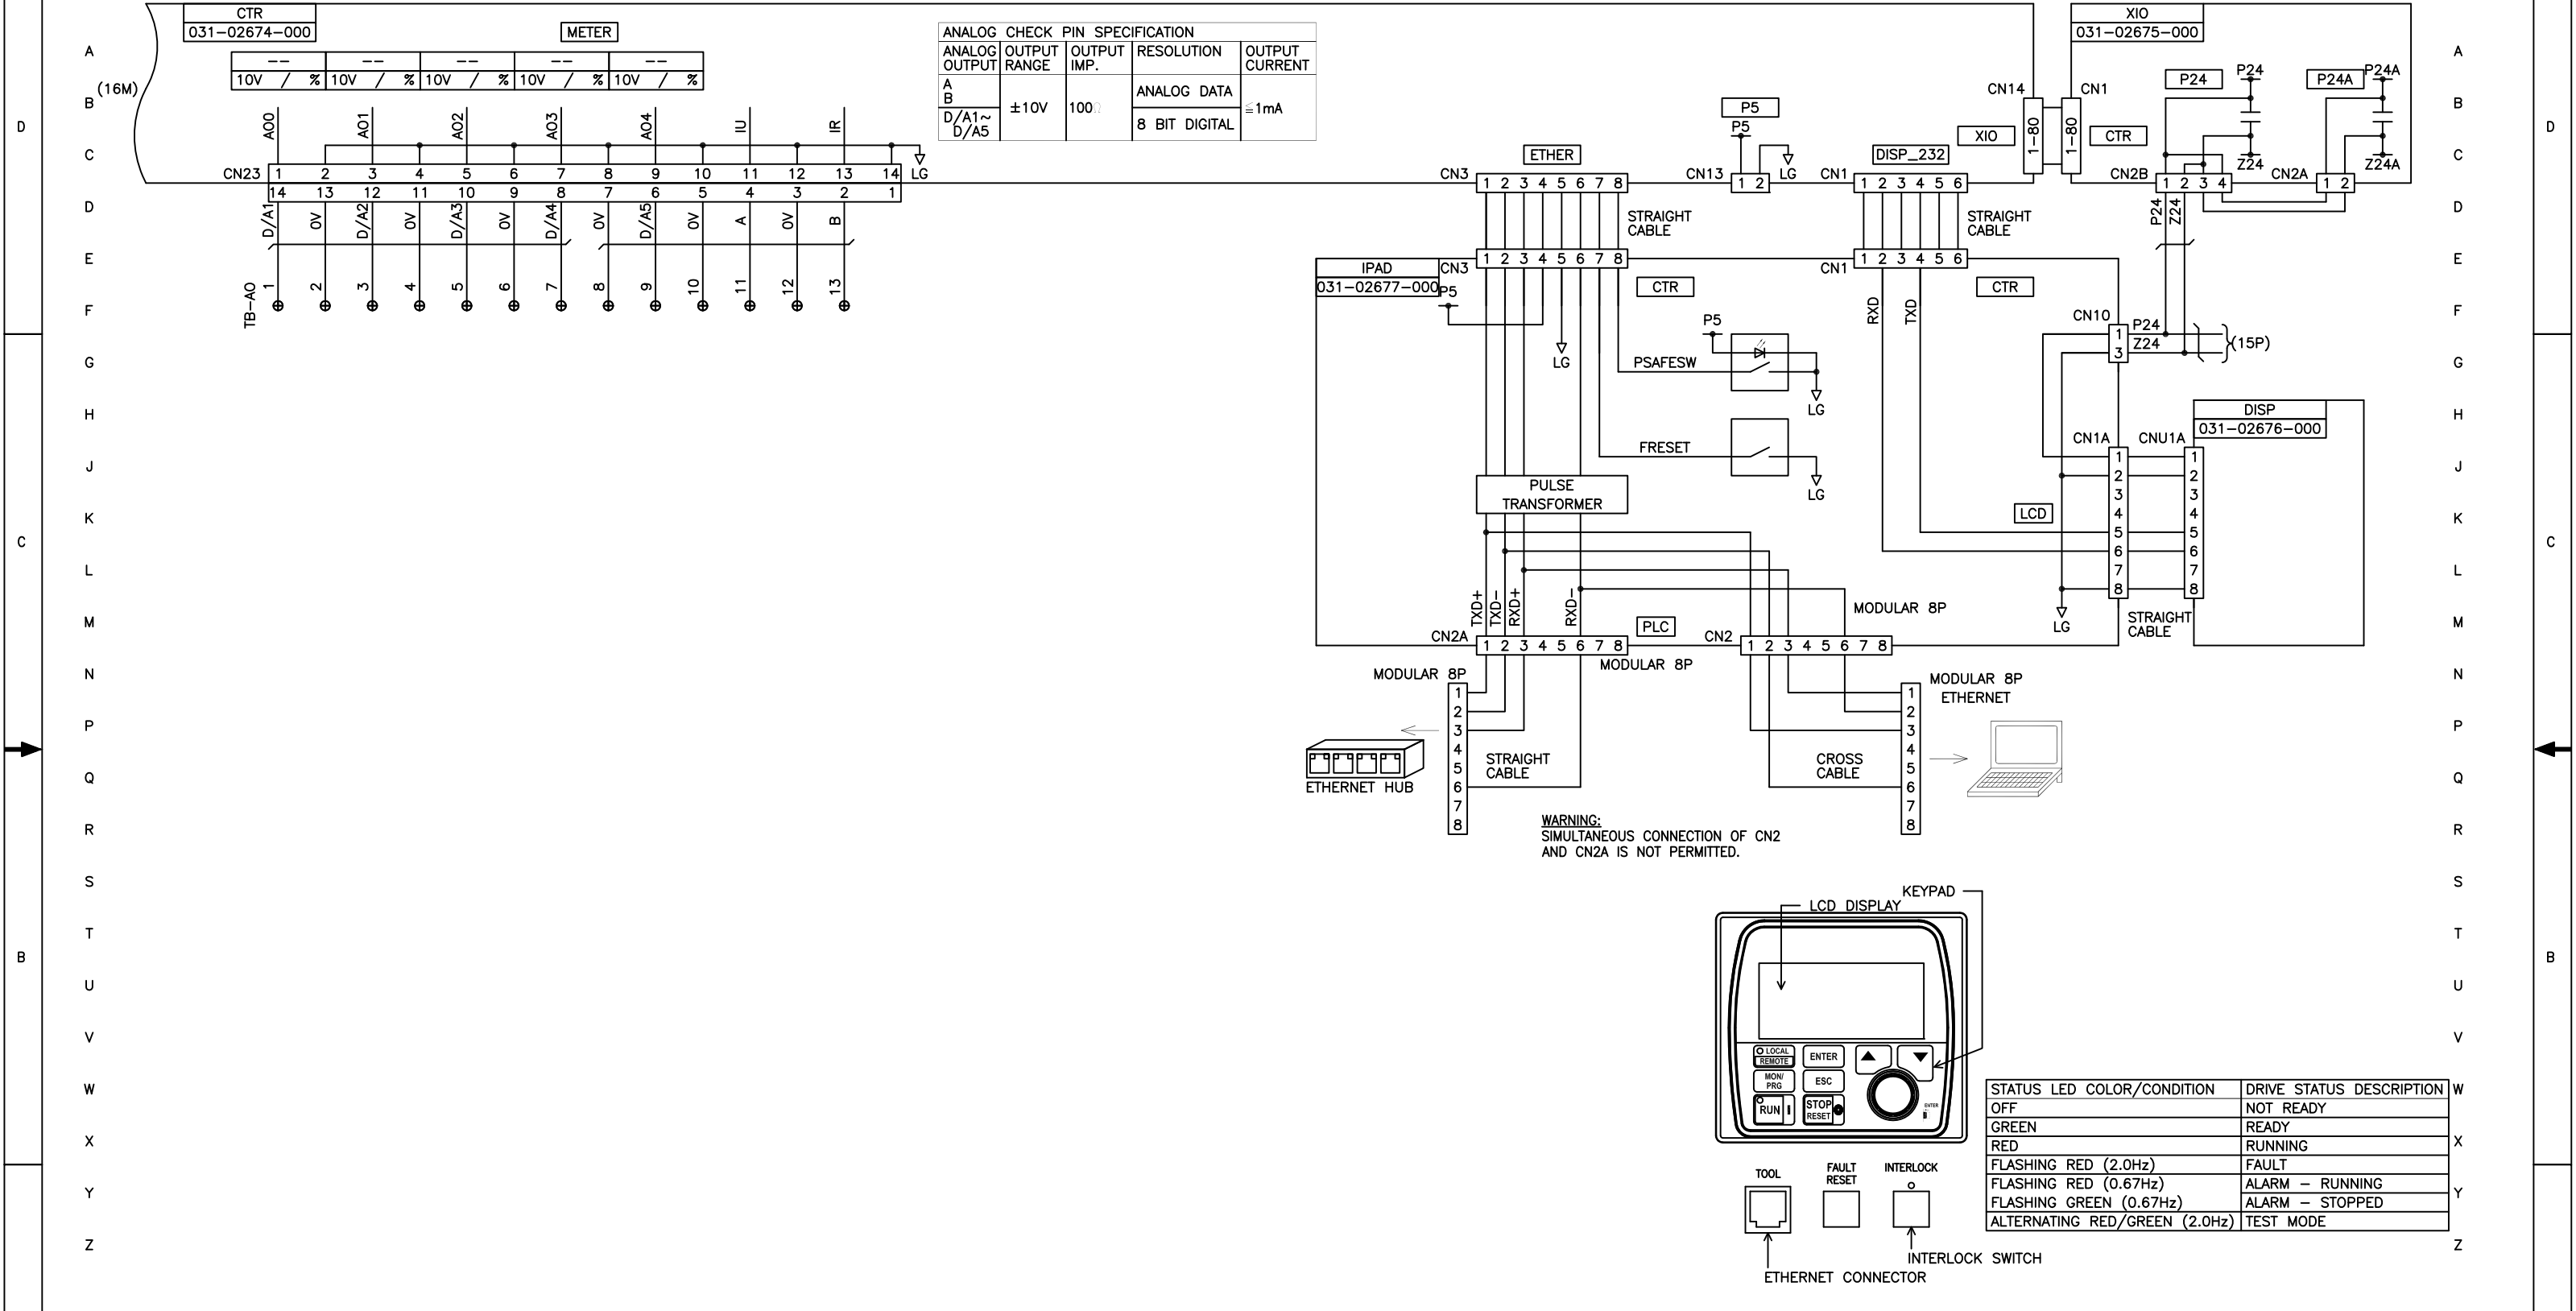

WARNING: SIMULTANEOUS CONNECTION OF CN2 AND CN2A IS NOT PERMITTED.

STATUS LED COLOR/CONDITION	DRIVE STATUS DESCRIPTION
OFF	NOT READY
GREEN	READY
RED	RUNNING
FLASHING RED (2.0Hz)	FAULT
FLASHING RED (0.67Hz)	ALARM - RUNNING
FLASHING GREEN (0.67Hz)	ALARM - STOPPED
ALTERNATING RED/GREEN (2.0Hz)	TEST MODE

YORK INTERNATIONAL CORPORATION
YORK, PA . 17405

REVISION RECORD REV. LEV. DATE CHG. NO. DR. CK. REV. LEV. DATE CHG. NO. DR. CK. REV. LEV. DATE CHG. NO. DR. CK. 6 13 20 5 12 19 4 11 18 3 10 17 2 9 16 1 8 15 0 06/17/09 FIRST ISSUE XZ AL 7 14		DIMENSIONS ARE IN INCHES DO NOT SCALE TOLERANCES PER ENG. STD. M-282 WELDING PER ENG. STD. M-30 REF. DWG.		MATERIAL PCB (2) INTERCONNECTION TYPE _____ ENG. STD. _____ PART NO. _____ CUT SIZE _____	
DR. APPR. SCALE: _____ NAME DATE SIZE CAGE NO. DRAWING NUMBER D 1808N317		WT. = _____ LBS. ORG. NO. SHEET 10 of 15		*ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR IN PART, OR DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS WITHOUT WRITTEN RELEASE BY YORK INTERNATIONAL CORPORATION.	