

**Features**

- 2-channel
- DC version, negative polarity
- Working voltage 24 V/18 V at 10  $\mu$ A
- Series resistance max. 340  $\Omega$ /437  $\Omega$
- Fuse rating 50 mA
- DIN rail mounting
- Asymmetrical version

**Function**


The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area.

The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has a negative polarity, i. e. the cathodes of the zener diodes are grounded.



Asymmetrical Zener Barriers are for optimization of applications which have different voltage levels regarding to ground potential.

Depending on the application, increased or decreased intrinsic safety parameters apply for serial or parallel connection. For the detailed parameters refer to the Zener Barrier certificate. Application examples can be found in the system description of the Zener Barriers.

**Assembly**

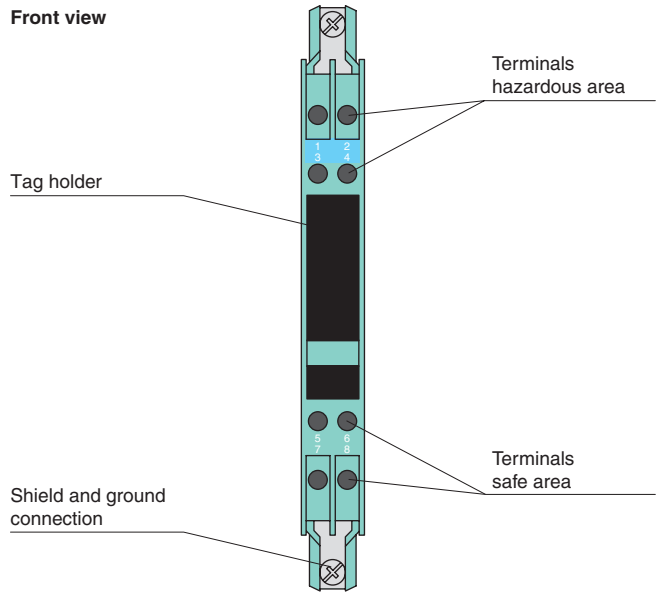

**Connection**

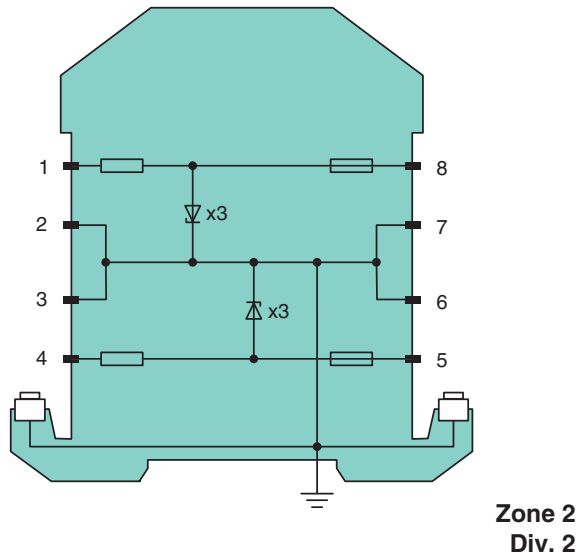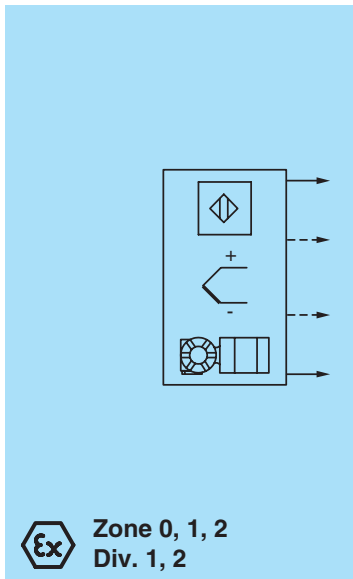

Release date 2009-01-13 16:36 Date of issue 2009-01-13 071809\_ENG.xml

<b>General specifications</b>	
Type	DC version, negative polarity
<b>Electrical specifications</b>	
Nominal resistance	terminals 1, 8: 320 Ω; terminals 4, 5: 415 Ω
Series resistance	terminals 1, 8: max. 340 Ω; terminals 4, 5: max. 437 Ω
Fuse rating	50 mA
<b>Hazardous area connection</b>	
Connection	terminals 1, 2; 3, 4
<b>Safe area connection</b>	
Connection	terminals 5, 6; 7, 8
Rated voltage	terminals 7, 8: 26.6 V; terminals 5, 6: 20.5 V
Supply voltage	terminals 7, 8: max. 25.1 V; terminals 5, 6: max. 19.5 V
Working voltage	terminals 7, 8: 24 V at 10 μA; terminals 5, 6: 18 V at 10 μA
<b>Conformity</b>	
Protection degree	IEC 60529
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 60 °C (253 ... 333 K)
Storage temperature	-25 ... 70 °C (248 ... 343 K)
Relative humidity	max. 75 % , without moisture condensation
<b>Mechanical specifications</b>	
Protection degree	IP54
Connection	self-opening connection terminals, max. core cross-section 2 x 2.5 mm <sup>2</sup>
Mass	approx. 150 g
Dimensions	12.5 x 115 x 110 mm (0.5 x 4.5 x 4.3 in)
Construction type	modular terminal housing , see system description
Mounting	mounting on 35 mm DIN rail acc. to DIN EN 60715
<b>Data for application in conjunction with hazardous areas</b>	
EC-Type Examination Certificate	BAS 01 ATEX 7005 , for additional certificates see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a>
Group, category, type of protection	⊕ II (1)GD [EEx ia] IIC (-20 °C ≤ T <sub>amb</sub> ≤ 60 °C)
Voltage U <sub>o</sub>	terminals 1, 2: 26.6 V; terminals 3, 4: 20.5 V
Current I <sub>o</sub>	terminals 1, 2: 85 mA; terminals 3, 4: 50 mA
Power P <sub>o</sub>	terminals 1, 2: 560 mW; terminals 3, 4: 260 mW
<b>Supply</b>	
Safety maximum voltage U <sub>m</sub>	250 V
Series resistance	terminals 1, 2: min. 314 Ω; terminals 3, 4: min. 407 Ω
Statement of conformity	TÜV 99 ATEX 1484 X , observe statement of conformity
Group, category, type of protection, temperature classification	⊕ II 3G EEx nA II T4 X
<b>Directive conformity</b>	
Directive 94/9 EC	EN 50014, EN 50020, EN 50021
<b>International approvals</b>	
<b>FM approval</b>	
Control drawing	116-0118
<b>UL approval</b>	
Control drawing	116-0139
<b>CSA approval</b>	
Control drawing	116-0119
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date 2009-01-13 16:36 Date of issue 2009-01-13 071809\_ENG.xml